


Cylindrical Cell Winding Machine



figure.01

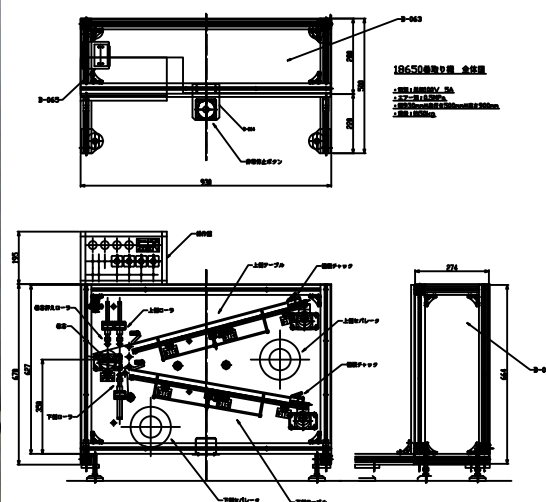

This machine combines the two electrodes and separator strip on a mandrel and winds the combination in jellyroll fashion into a tight bobbin or cell core.

Specification:

Model No. CW-60-700-4M

- 1) Mandrel $\phi 4\text{mm}$
- 2) Width of substrate 40mm to 60mm
- 3) Length of substrate 200mm to 700mm
- 4) Maximum tension 2kgf for both separators and electrodes
*Tension is adjustable by volume switch at controller
- 5) Dimension 930mm(W) X 500mm(D) X 865mm
(including controller box)
- 6) Weight Approx. 60kg
- 7) Power supply AC100V 5A
- 8) Compressed Air Minimum 0.35Mpa

Options:

*The mandrel is available to change to larger size or rectangular type.

お問合せ先
有限会社イーガーコーポレーション
〒595-0804 大阪府泉北郡忠岡町馬瀬3-1-1
電話: 0725-33-5666 ファックス: 0725-32-6660
<http://www.eagercorp.biz/> info@eagercorp.biz

CONTACT
EAGER CORPORATION
3-1-1 MAZE TADAOKA-CHO SENBOKU-GUN
ZIP: 595-0804 OSAKA JAPAN
PHONE: 0725-33-5666 FAX: 0725-32-6660
<http://www.eagercorp.biz/> info@eagercorp.biz